
# CROSS PROGRESSIVE HANDLE KIT

## INSTALLATION GUIDE

This product must be installed by a licensed plumber. This is a general installation guide - there are many factors that are involved that can alter the installation method. This product install must comply with AS/NZS 3500.


NOTE: See Progressive Mixer Body installation guide for In-Wall set out.

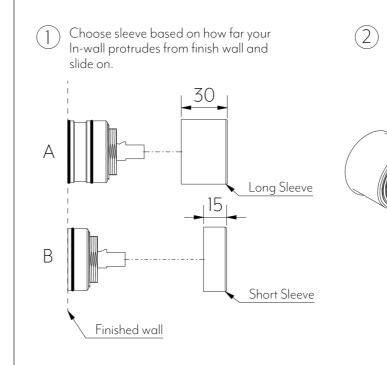

## MIXER OPERATION

## WHAT'S IN THE BOX

- 1. Back plate 2. Long sleeve 3. Dome
- 4. Handle
- 5. Grub screw
- 6. Short sleeve 7. Allen key

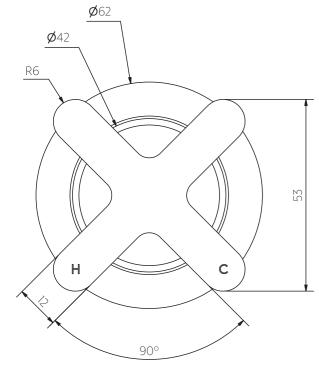

Front View

Note: In-wall not included in handle kit

Note: Dimensions are nominal measurements only

## **SPECIFICATIONS**

**RECOMMENDED USE** 

Domestic

Side View

71

41

15

30


15

### CONSTRUCTION

Solid Brass

Disclaimer: Products in this manual must by law be installed by licensed and registered tradespeople in accordance with the relevant standards. ABI and the manufacturer/distributor reserve the right to vary specifications or delete models from their range without prior notification. Dimensions are nominal measurements only. The information listed is correct at the time of publication, however ABI and the manufacturer/distributor takes no responsibility for printing errors. Copyright © ABI Interiors Pty Ltd 2021.










Slide back plate on. Screw dome on.

(3)

Tighten grub screw with allen key. Replace grub screw cap.





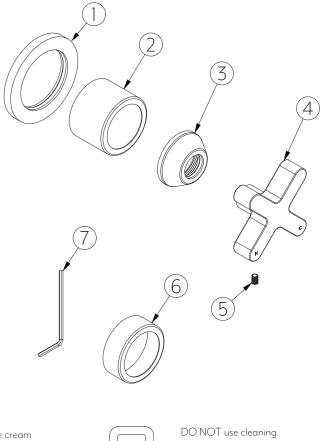



DO NOT use cream cleaners or bleach. These substances are abrasive



pads with abrasive surfaces as this may scratch the material

## (IN-WALL) PROGRESSIVE MIXER BODY - SOLID BRASS



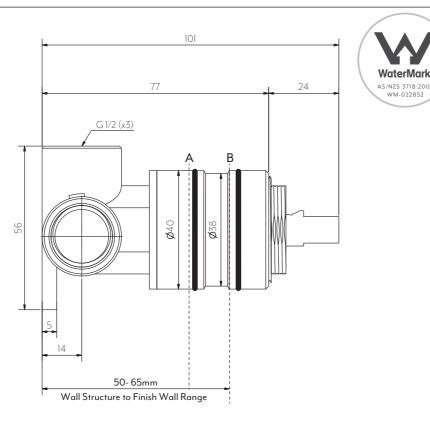

Front View

Side View

DISCLAIMER: To achieve infiniti (interchangeable sleeves) finish wall must fall between point A and B. Please ensure waterproofing is set back from finish wall and does not obstruct sleeves.

**Note:** Dimensions are nominal measurements only SPECIFICATIONS Domestic **RECOMMENDED USE** CONSTRUCTION Solid Brass Recommended minimum working pressure 150kPa PRESSURE RATING Recommended maximum working pressure 500kPa Hot and cold water inlet pressure should be equal Maximum continuous working temperature 75°Clf the water temperature exceeds 75°C, an approved temper-TEMPERATURE RATING ing valve must be fitted Storage tank: Yes SUITABLE HOT WATER UNITS Continuous Flow: Yes Gravity Feed: Not suitable STANDARDS

AS/NZS 3718:2005, WM-022852

Disclaimer: Products in this specification manual must by regulation be installed by licensed and registered trade people. The manufacturer/distributor reserves the right to vary specifications or delete models from their range without prior notification. Dimensions are nominal measurements only. Dimensions and set-outs listed are correct at time of publication however the manufacturer/distributor takes no responsibility for printing errors. All ABI Products are designed in Australia. Copyright ABI Interiors Pty Lty 2021.

## INSTALLATION GUIDE


This product must be installed by a licensed plumber. This is a general installation guide - there are many factors that are involved that can alter the installation method. This product install must comply with AS/NZS 3500.

## **ROUGH IN**

See Specification image for finish wall setback

Screw in-wall body into wall (1)structure with provided screws.








## WHAT'S IN THE BOX

1. Body 2. Fixing screws 3. Cartridge 4. Locking nut

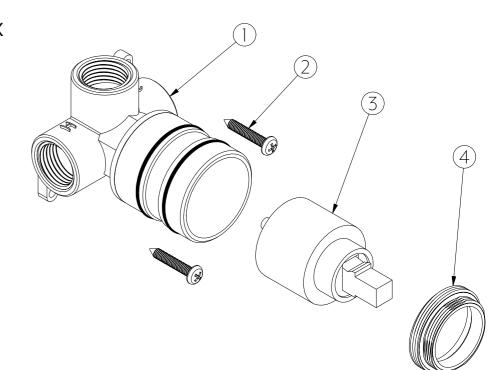




Regularly clean with mild liquid detergent or soap and water





Sheeting and waterproof layer can now be applied. \*Ensure cutout in finish wall is 47mm diameter.

**Ø** 47mm





DO NOT use cream cleaners or bleach. These substances are



DO NOT use cleaning pads with abrasive surfaces as this may scratch the material