


Front View



Bottom View



Note: Dimensions are nominal measurements only

SPECIFICATIONS

RECOMMENDED USE

Domestic

MATERIAL

304 Stainless Steel

STANDARDS

Nominal Flow Rate 6L/min

TEMPERATURE RATINGS

Maximum continuous working temperature 75°C
If the water exceeds 75°C, an approved tempering valve must be fitted

PRESSURE RATINGS

Recommended minimum working pressure 0.2 Bar
Recommended maximum working pressure 5 Bar
Hot and cold water inlet pressure should be equal

SUITABLE FOR HOT WATER UNITS


Storage tank: Yes
Continuous flow: Yes
Gravity fed system: Suitable

INSTALLATION GUIDE


Note: This product install must comply with AS/NZS 3500, for installs outside Australia and New Zealand, the standards in your respective country must be adhered to by your licensed tradesperson.




1 Pull nozzle out from mixer.

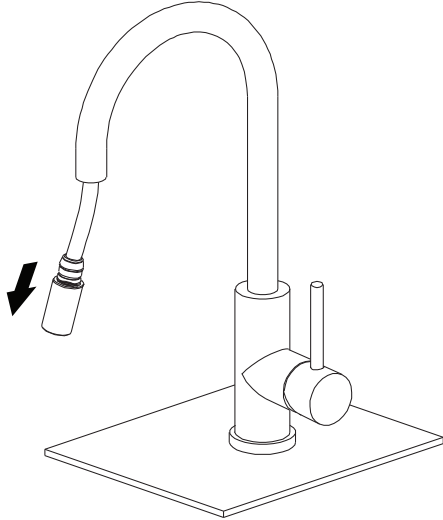


2 Secure hose and untighten pull out nozzle to remove.

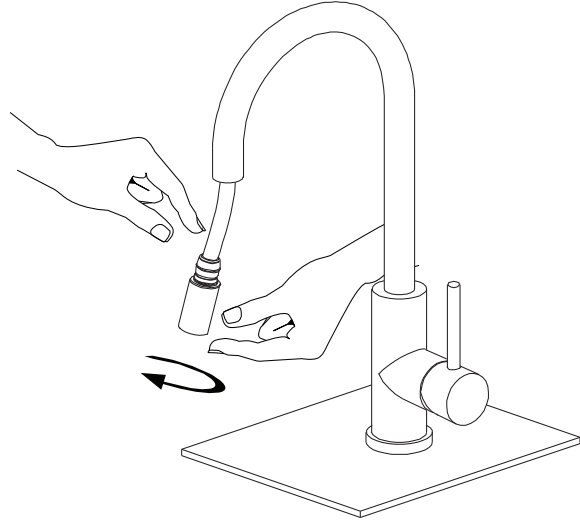

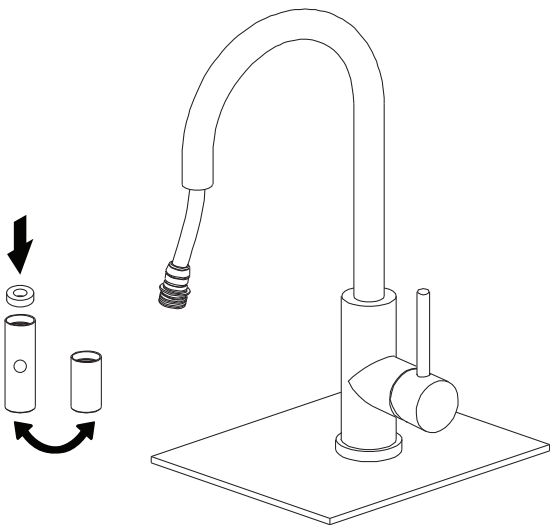

3 1. Insert O ring into spray attachment.
2. Replace pull out nozzle with spray attachment.

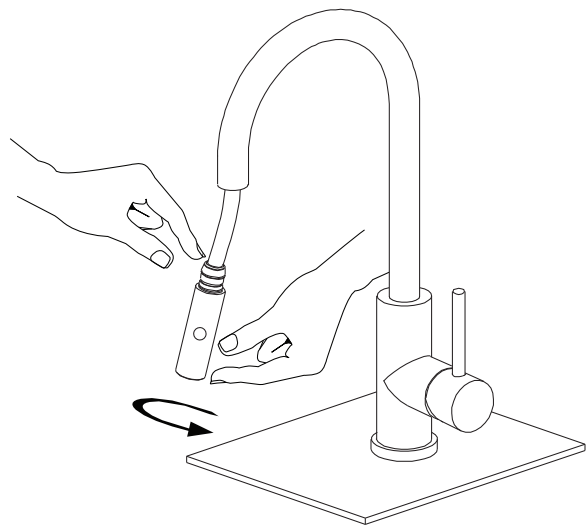

4 Tighten spray attachment onto pull out hose. O ring should be inbetween nozzle and hose.



IN THE BOX	
	1x O Ring
	1x Spray Attachment



Regularly clean with mild liquid detergent or soap and water



DO NOT use cream cleaners or bleach. These substances are abrasive



DO NOT use cleaning pads with abrasive surfaces as this may scratch the material


INSTALLATION GUIDE

Note: This product install must comply with AS/NZS 3500, for installs outside Australia and New Zealand, the standards in your respective country must be adhered to by your licensed tradesperson.



USER GUIDE

* During low pressure use, the switch will automatically shift to neutral position

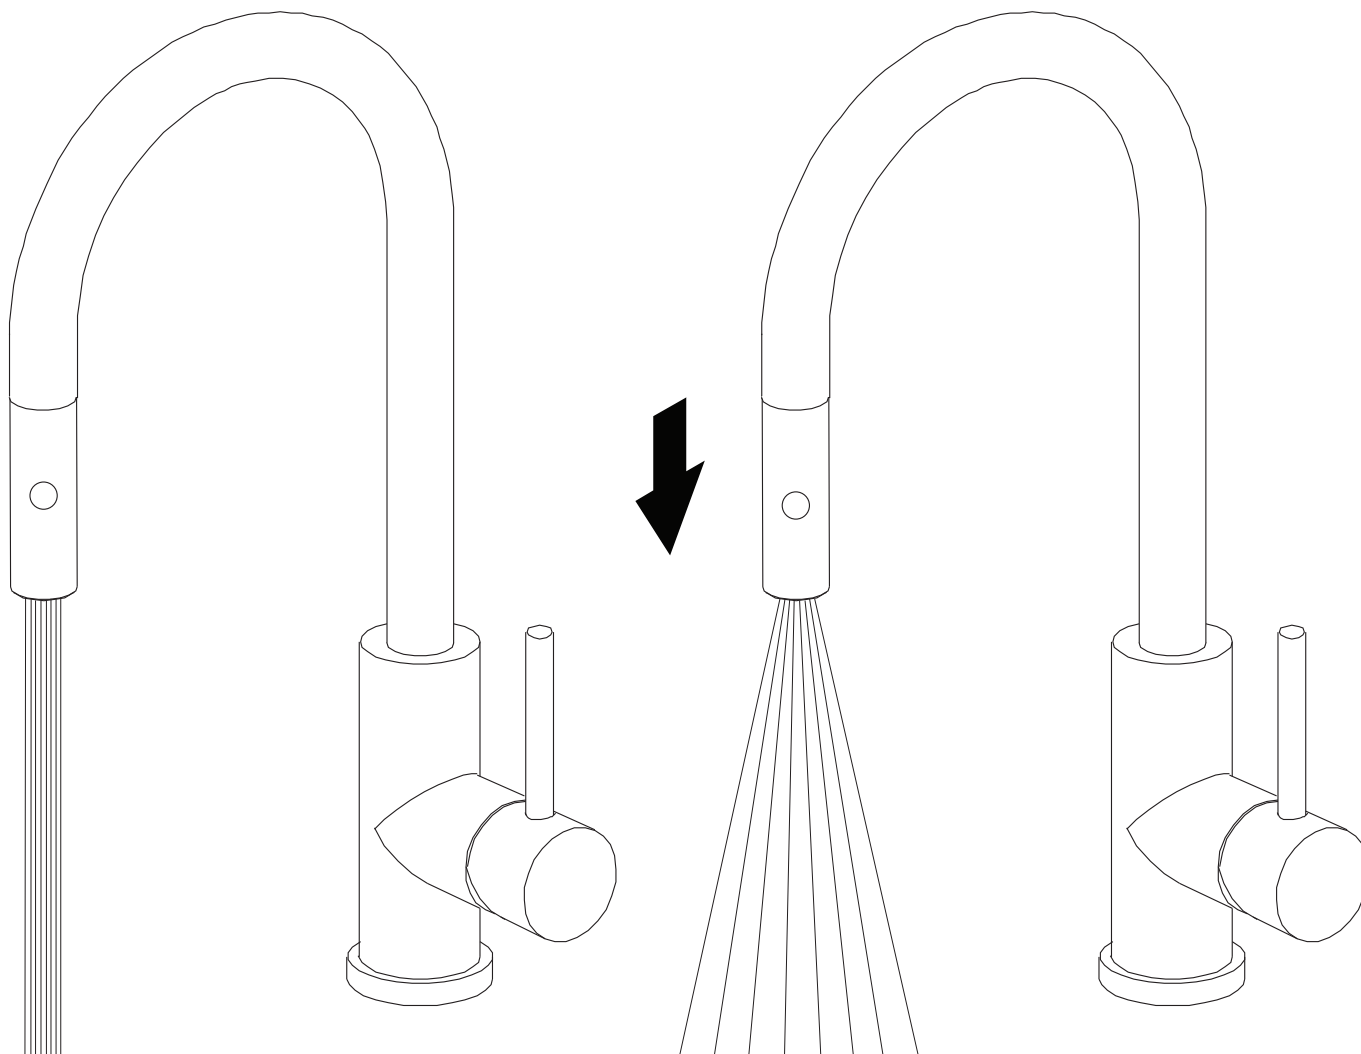

Neutral Position


Down Position



Regularly clean with mild liquid detergent or soap and water



DO NOT use cream cleaners or bleach. These substances are abrasive



DO NOT use cleaning pads with abrasive surfaces as this may scratch the material