

**Note:** Dimensions are nominal measurements only

### SPECIFICATIONS

<b>RECOMMENDED USE</b>	Domestic
<b>MATERIAL</b>	Brass
<b>FUNCTIONS</b>	Standard spray
<b>PRESSURE RATING</b>	Recommended minimum working pressure 150kPa Recommended maximum working pressure 500kPa Hot and cold water inlet pressure should be equal
<b>TEMPERATURE RATING</b>	Maximum continuous working temperature 75°C If the water temperature exceeds 75°C, an approved tempering valve must be fitted
<b>SUITABLE HOT WATER UNITS</b>	Storage tank: Yes Continuous Flow: Yes Gravity Feed: Not suitable
<b>STANDARDS</b>	WELS Star Rating 4 star - Flow Rate: 7L/min Registration No. S16475, WMKT25262

Disclaimer: Products in this specification manual must by regulation be installed by licensed and registered trade people. The manufacturer/distributor reserves the right to vary specifications or delete models from their range without prior notification. Dimensions are nominal measurements only. Dimensions and set-outs listed are correct at time of publication however the manufacturer/distributor takes no responsibility for printing errors. All ABI Products are designed in Australia. Copyright ABI Interiors 2019.


### INSTALLATION GUIDE

Note: This product must be installed by a licensed tradesperson. This is a general installation guide - there are many factors that are involved that can alter the installation method. This product install must comply with AS/NZS 3500

STEP ONE: Ensure flat washer is fitted inside the hose end.

STEP TWO: Connect the swivelling cone end of hose in a clockwise direction onto the Vino Hand Shower and hand tighten


Hand Shower

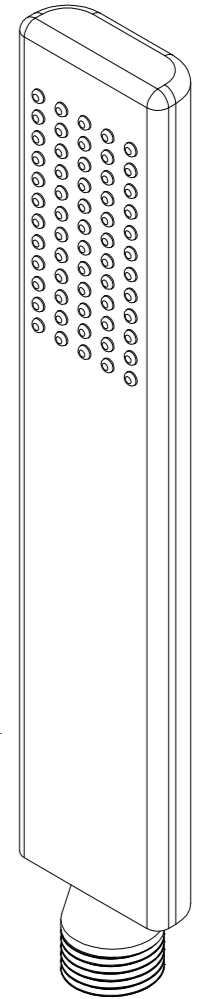

Flat Washer




Shower Hose Swivelling Cone

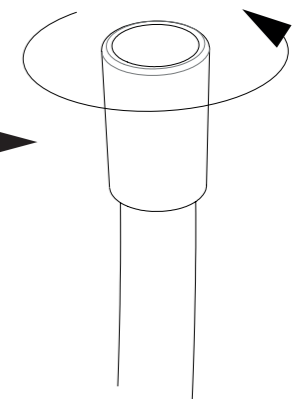

Regularly clean with mild liquid detergent or soap and water



DO NOT use cream cleaners or bleach. These substances are abrasive



DO NOT use cleaning pads with abrasive surfaces as this may scratch the material