


## KOBI HAND SHOWER

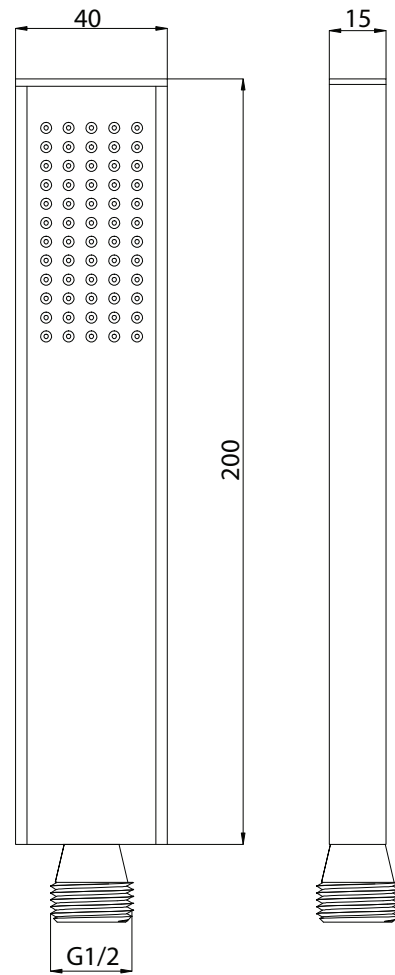

**Note:** Dimensions are nominal measurements only

### SPECIFICATIONS

<b>RECOMMENDED USE</b>	Domestic
<b>MATERIAL</b>	Brass
<b>FUNCTIONS</b>	Standard spray
<b>PRESSURE RATING</b>	Recommended minimum working pressure 0.2 Bar Recommended maximum working pressure 5 Bar Hot and cold water inlet pressure should be equal
<b>TEMPERATURE RATING</b>	Maximum continuous working temperature 75°C If the water temperature exceeds 75°C, an approved tempering valve must be fitted
<b>SUITABLE HOT WATER UNITS</b>	Storage tank: Yes Continuous Flow: Yes Gravity Feed: Suitable

Disclaimer: Products in this manual must by law be installed by licensed and registered tradespeople in accordance with the relevant standards. ABI and the manufacturer/distributor reserve the right to vary specifications or delete models from their range without prior notification. Dimensions are nominal measurements only. The information listed is correct at the time of publication, however ABI and the manufacturer/distributor takes no responsibility for printing errors. Copyright © ABI Interiors 2021


### INSTALLATION GUIDE

Note: This product must be installed by a licensed plumber. This is a general installation guide - there are many factors that are involved that can alter the installation method. For installs outside Australia and New Zealand, the standards in your respective country must be adhered to by your licensed tradesperson.

**STEP ONE:** Ensure flat washer is fitted inside the hose end.

**STEP TWO:** Connect the swivelling cone end of hose in a clockwise direction onto the Vino Hand Shower and hand tighten


Hand Shower

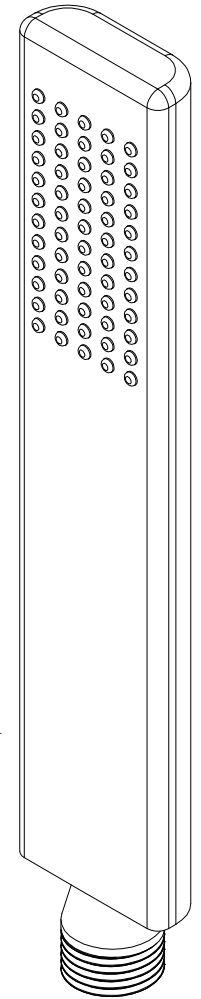

Flat Washer




Shower Hose Swivelling Cone

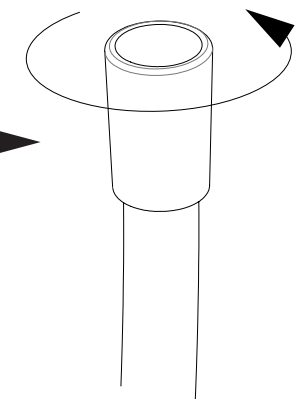

Regularly clean with mild liquid detergent or soap and water



DO NOT use cream cleaners or bleach. These substances are abrasive



DO NOT use cleaning pads with abrasive surfaces as this may scratch the material