

Disclaimer: To achieve infinity (interchangeable sleeves) **finish wall** must fall between **Point A** and **B**. Your In-wall component must be installed **without the sleeve attached**, please ensure that your chosen sleeve doesn't break your waterproofing seal.

Note: Dimensions are nominal measurements only

SPECIFICATIONS

RECOMMENDED USE

Domestic

CONSTRUCTION

Stainless Steel 316

TEMPERATURE RATING

Maximum continuous working temperature 75°C
If the water temperature exceeds 75°C, an approved tempering valve must be fitted

PRESSURE RATING

Recommended minimum working pressure 150kPa
Recommended maximum working pressure 500kPa
Hot and cold water inlet pressure should be equal

STANDARDS







WELS: 5 star, 5.5L/min (T39900).
WM-022852, AS/NZS 3718:2005

Disclaimer: Products in this manual must by law be installed by licensed and registered tradespeople in accordance with the relevant standards. ABI and the manufacturer/distributor reserve the right to vary specifications or delete models from their range without prior notification. Dimensions are nominal measurements only. The information listed is correct at the time of publication, however ABI and the manufacturer/distributor takes no responsibility for printing errors. Copyright © ABI Interiors 2021.


INSTALLATION GUIDE

Note: This product must be installed by a licensed plumber.
This is a general installation guide - there are many factors that are involved that can alter the installation method. This product install must comply with AS/NZS 3500

- Fasten screws to secure the wall mixer into wall structure.
- Attach water supply and water outlet. **TEST AND CHECK FOR LEAKS.**
- Create a 47mm hole in cement sheet and tiles.
Waterproof at this point if future sleeve change is desired.
DO NOT WATERPROOF SLEEVE.
Please ensure that the hole is big enough to allow for the sleeve to slide on at fit-off stage.
- Push the sleeve over the body until it is as far back as possible and nut thread is exposed. Screw the dome onto the brass fitting and tighten.
- Place the handle onto the fitting. Fasten the grub screw firmly with the allen key.

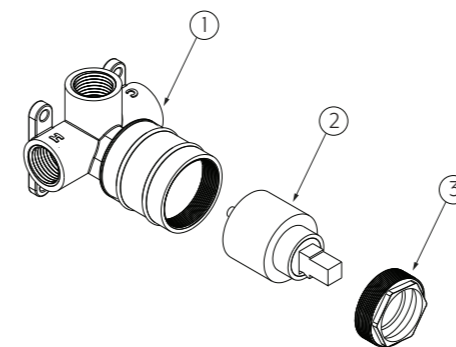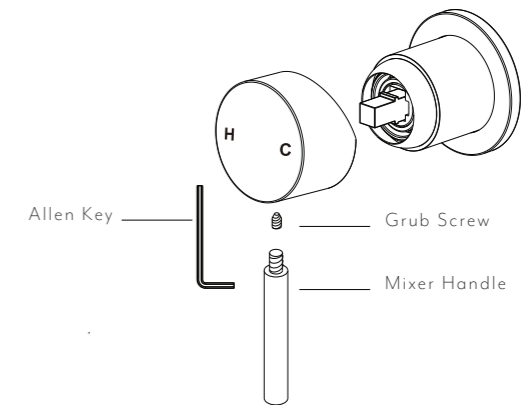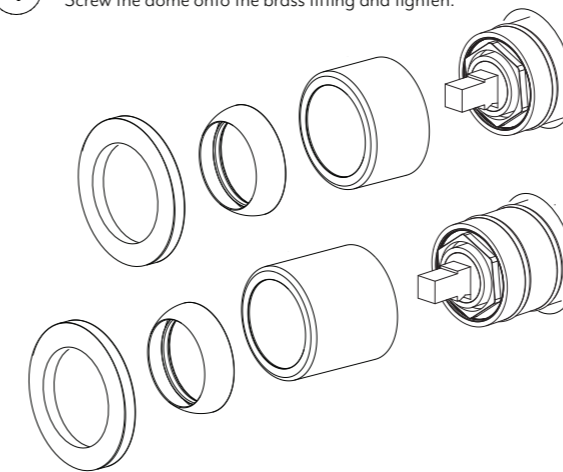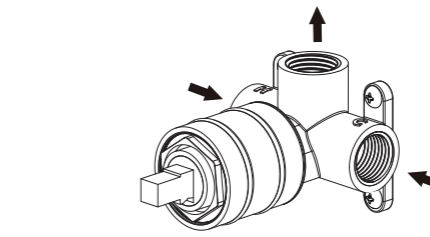

IN THE BOX (IN-WALL)
1. Body
2. Cartridge
3. Locking nut

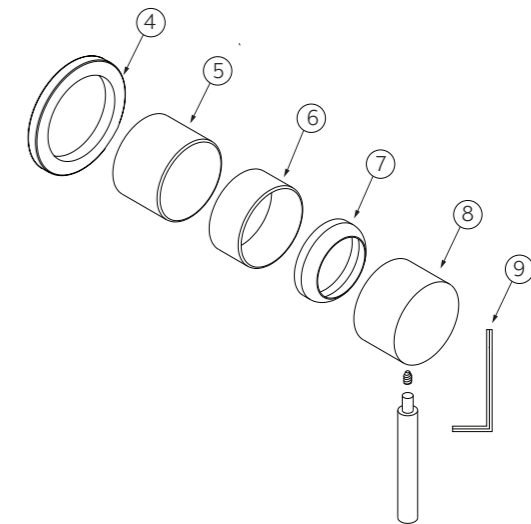

IN THE BOX (HANDLEKIT)
4. Back plate
5. Long cover sleeve
6. Short cover sleeve
7. Dome
8. Mixer handle assembly
9. Allen key




Regularly clean with mild liquid detergent or soap and water



DO NOT use cream cleaners or bleach. These substances are abrasive



DO NOT use cleaning pads with abrasive surfaces as this may scratch the material

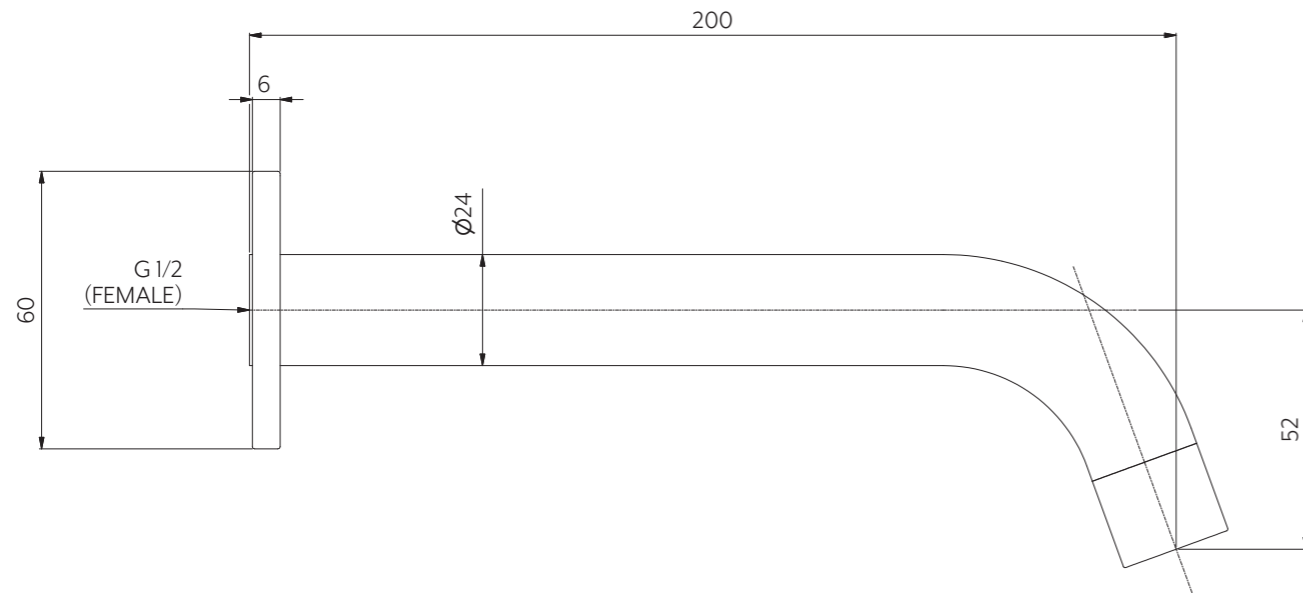

SIDE VIEW

Note: Dimensions are nominal measurements only

SPECIFICATIONS

RECOMMENDED USE

Domestic

CONSTRUCTION

Stainless Steel 316

TEMPERATURE RATING

Maximum continuous working temperature 75°C
If the water temperature exceeds 75°C, an approved tempering valve must be fitted

PRESSURE RATING

Recommended minimum working pressure 150kPa
Recommended maximum working pressure 500kPa
Hot and cold water inlet pressure should be equal

STANDARDS



WELS: 5 star, 5.5L/min (T39900).
WM-022852, AS/NZS 3718:2005

Disclaimer: Products in this manual must by law be installed by licensed and registered tradespeople in accordance with the relevant standards. ABI and the manufacturer/distributor reserve the right to vary specifications or delete models from their range without prior notification. Dimensions are nominal measurements only. The information listed is correct at the time of publication, however ABI and the manufacturer/distributor takes no responsibility for printing errors. Copyright © ABI Interiors 2021.

INSTALLATION GUIDE

Note: This product must be installed by a licensed plumber.
This is a general installation guide - there are many factors that are involved that can alter the installation method. This product install must comply with AS/NZS 3500

- Slide the back plate onto the spout - make sure that the rubber is firmly in place to protect the spout and stop the back plate from moving.
- Apply the teflon tape to the brass nipple. Twist the spout on and hand tighten.

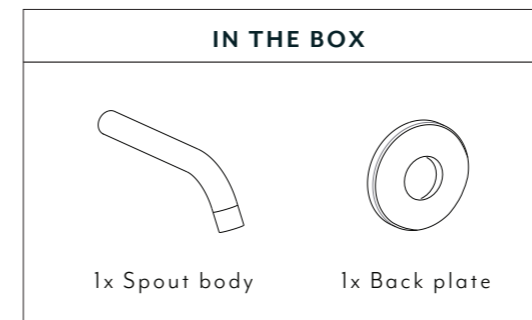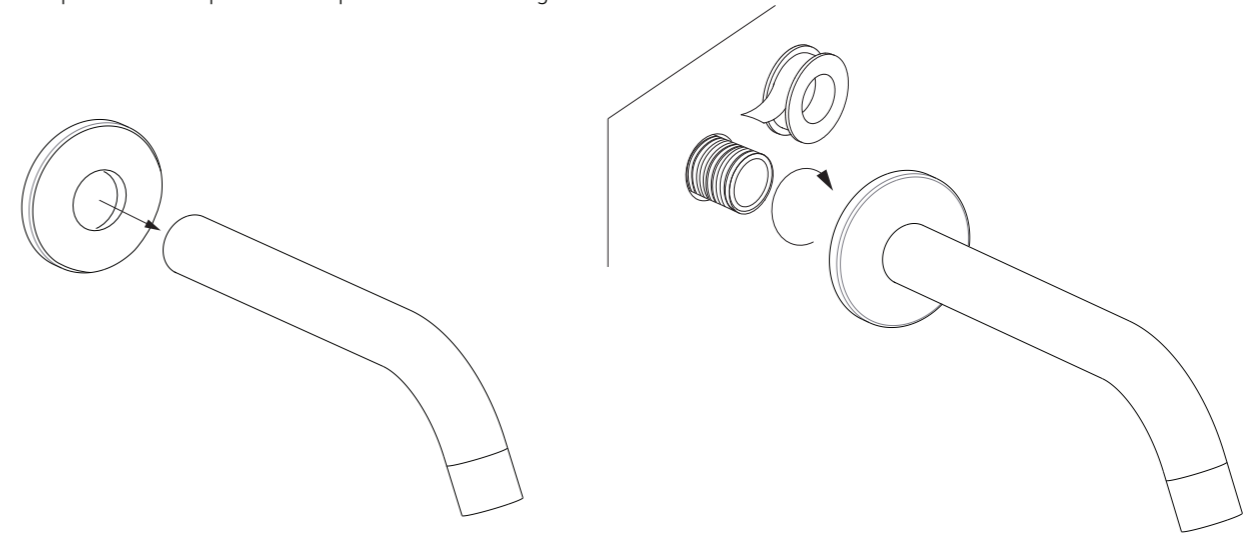

Regularly clean with mild liquid detergent or soap and water



DO NOT use cream cleaners or bleach. These substances are abrasive



DO NOT use cleaning pads with abrasive surfaces as this may scratch the material