


## SCALO CABINETRY PULL

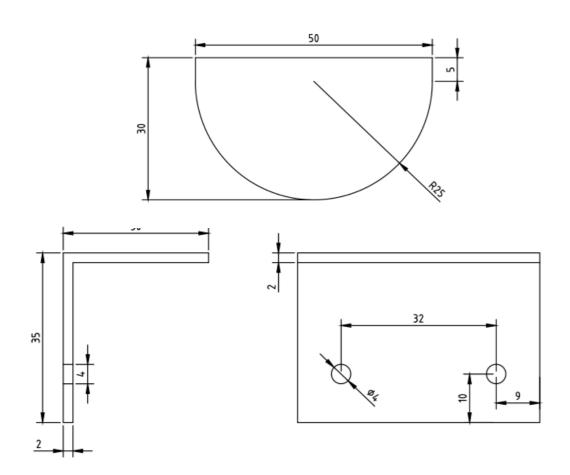

**Note:** Dimensions are nominal measurements only

SPECIFICATIONS	
RECOMMENDED USE	Domestic
CONSTRUCTION	Solid Brass
MOUNTING HARDWARE INCLUDED	Yes
SCREW / BOLT TYPE	M3*14/16/18mm
MOUNTS FROM	Top & Side
HOLE DISTANCE	32mm (centre to centre)

Disclaimer: Products in this specification manual must by regulation be installed by licensed and registered trade people. The manufacturer/distributor reserves the right to vary specifications or delete models from their range without prior notification. Dimensions are nominal measurements only. Dimensions and set-outs listed are correct at time of publication however the manufacturer/distributor takes no responsibility for printing errors. All ABI Products are designed in Australia. Copyright ABI Interiors Pty Ltd 2021.

## **INSTALLATION GUIDE**


Open and inspect the item for any shipping damages.

We recommend a qualified tradesperson to install ABI fixtures. ABI accepts no liability for any damage to the drawer or cabinet and personal injury during installation.

This is a general install guide - there are many factors that are involved that can alter the installation method.

## INSTALLATION PROCEDURE

- 1. Determine the position of the cabinetry pull.
- 2. Use the tape measure to find the center of the cabinetry panel (if you are installing only one pull), or divide your cabinetry panel into quarters or a placement you prefer (if you are installing two pulls on the cabinetry panel).
- 3. Position back edge of handle flush with back face of cabinetry panel
- 4. Use the pencil to mark the centre of the holes
- 5. Drill out the centre of marked holes with a 2mm drill bit, 15mm deep.
- 6. Position the pull to the cabinetry and use the screw driver to tighten the bolt.

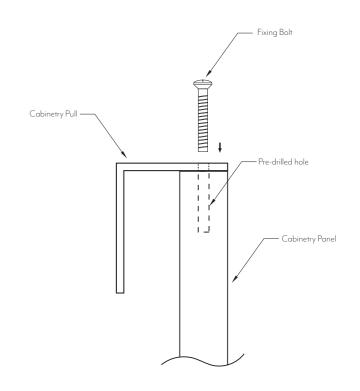

## TOOLS AND MATERIALS












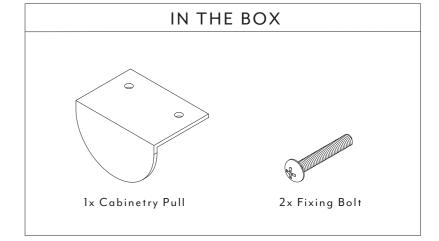



Regularly clean with mild liquid detergent or soap and water



DO NOT use cream cleaners or bleach. These substances are abrasive



DO NOT use cleaning pads with abrasive surfaces as this may scratch the material